

Liquidtight Straight Connector




Material: Die-cast Zinc

Application: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or weatherproof box or enclosure

UL File No. E475294

Cat. No.	Trade Size	Dimensions (in)		
		A	B	C
LTST050	1/2"	1.444	1.307	0.551
LTST075	3/4"	1.448	1.583	0.551
LTST100	1"	1.810	1.780	0.716
LTST125	1-1/4"	2.031	1.909	0.716
LTST150	1-1/2"	1.991	2.488	0.716
LTST200	2"	2.007	2.992	0.684
LTST250	2-1/2"	3.279	3.709	0.984
LTST300	3"	3.440	4.331	1.011
LTST400	4"	3.984	5.173	1.035

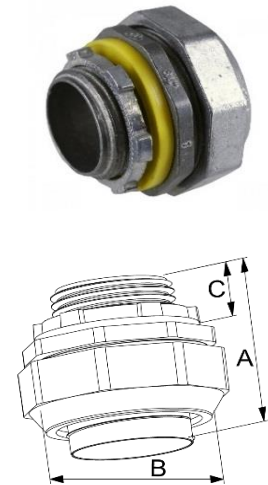

90° Liquidtight Angle Connector

Material: Die-cast Zinc

Application: To terminate and seal liquidtight flexible metal conduit to an oiltight, liquidtight or weatherproof box or enclosure.



UL File No. E475294

Cat. No.	Trade Size	Dimensions (in)		
		A	B	C
LT90050	1/2"	2.433	2.153	0.511
LT90075	3/4"	2.717	2.519	0.563
LT90100	1"	3.425	2.885	0.720
LT90125	1-1/4"	3.976	3.220	0.838
LT90150	1-1/2"	4.122	3.700	0.708
LT90200	2"	4.701	4.184	0.680
LT90250	2-1/2"	6.189	5.149	1.043
LT90300	3"	7.087	6.133	0.964
LT90400	4"	8.531	7.405	1.027

