




**SLOTTED**


**Features:**

- Self-extinguishing PVC, lead-free
- UL94 V-0 flammability rating
- Smooth edges protect hands and wire insulation
- Open slot design for easy insertion/removal of wires
- Continuous use temperature: -40~+70°C
- Gray (RAL7042)
- with cover, 2M
- UL Listed #E492107

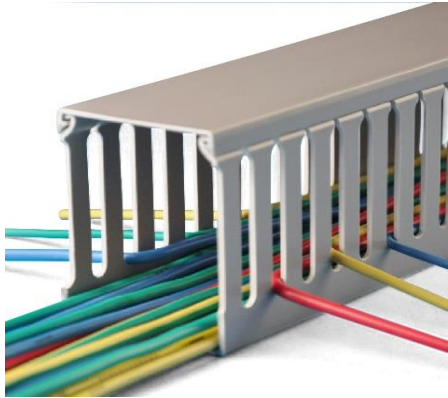

**Application:**

For routing and concealing of wires in a variety of industrial control and telecommunication applications.

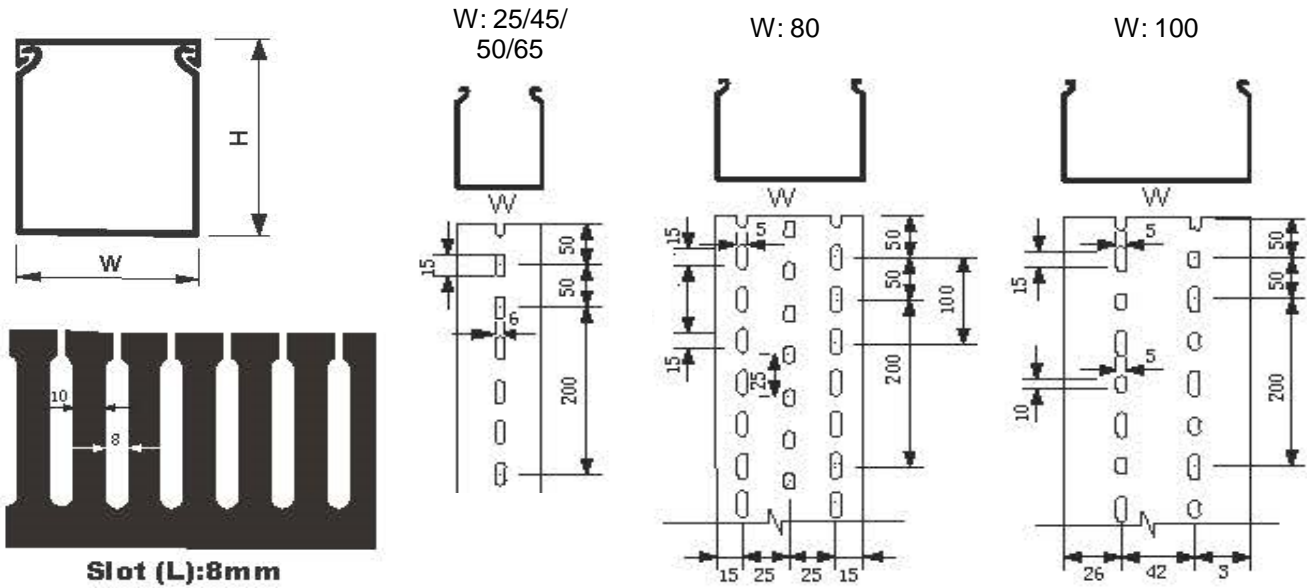

Cat. No.	Size		Slot Size	Thickness	Wires to be connected	Packing details
	mm (WxH)	inch (WxH)				
MGC2525	25 x 25	1 x 1	8mm	1.3	10-25pcs	90pcs/box
MGC2545	25 x 45	1 x 1-3/4		1.8	20-25pcs	54pcs/box
MGC3345	33 x 45	1-1/4 x 1-3/4		1.6	40-55 pcs	42pcs/box
MGC4545	45 x 45	1-3/4 x 1-3/4		1.6	60-70pcs	46pcs/box
MGC4565	45 x 65	1-3/4 x 2-1/2		2.1	110-120pcs	42pcs/box
MGC5050	50 x 50	2 x 2		1.8	80-90pcs	40pcs/box
MGC6565	65 x 65	2-1/2 x 2-1/2		1.8	180-200pcs	30pcs/box
MGC5080	50 x 80	2 x 3		2.2	160-180pcs	24pcs/box
MGC8080	80 x 80	3 x 3		2.0	240-290pcs	16pcs/box
MGC100100	100 x 100	4 x 4		2.2	300-400pcs	12pcs/box