





SOLID

Features:

- High impact, self-extinguishing PVC, lead-free
- UL94 V-0 flammability rating
- Continuous use temperature: -40~+70°C
- Cover design prevents slipping when in vertical orientation
- Smooth edges protect hands and wire insulation
- White (RAL9003)
- UL Listed #E492107
- Length: 2 meters

Application:

For routing, organizing, and protection of wires in applications requiring few or no breakout points.

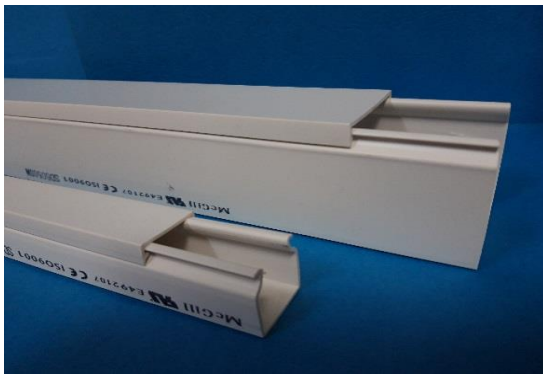

Cat. No.	Size		Type	Thickness	Wires to be connected	Packing details
	mm (WxH)	inch (WxH)		mm		
MGC2525SW	25 x 25	1 x 1	solid	1.3	10-25pcs	90pcs/box
MGC5050SW	50 x 50	2 x 2	solid	1.8	80-90pcs	40pcs/box